

3 Conductor 28 AWG Flexible Miniature Cable

CONSTRUCTION DETAILS

A	CONDUCTOR	28 AWG 65/46 SILVER PLATED COPPER
B	INSULATION	EXTRUDED FLEXI-LENE 300 .010" NOMINAL WALL THICKNESS
C	CABLING	CABLE TWO 28 AWG SINGLE WIRES
D	SHIELD	BRAIDED 44 AWG SILVER PLATED COPPER 90% MINIMUM COVERAGE
E	JACKET	EXTRUDED FLEXI-LENE 300 .015" NOMINAL WALL THICKNESS COLOR - WHITE

DIAMETER (INCH) NOM.

0.015
0.035
0.075
0.112

COLOR CODE

- 1 WHITE
- 2 BLACK
- 3 RED

PROPERTIES


TEMPERATURE -60°C TO 200°C
VOLTAGE 600 RMS

WEIGHT 7.20 LBS/MFT

ROHS COMPLIANT

PACKAGING

TO BE SUPPLIED ON BULK REELS - 100 FOOT MINIMUM LENGTHS

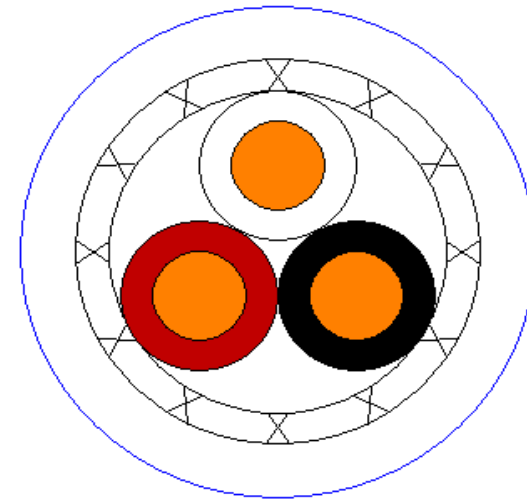

<small>THIS DRAWING IS THE PROPERTY OF THE WHITMOR/WIRENETICS COMPANY AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASES FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITH OUT THE WRITTEN PERMISSION OF THE WHITMOR/WIRENETICS COMPANY</small> APPROVED BY: M. LEE DRAWN BY: M. ELMORE	REVISIONS			
		N/A	11/01/13	INITIAL RELEASE

WHITMOR/WIRENETICS
THE LEADER IN HIGH QUALITY WIRE AND CABLE

DRAWING NO: **W-SIL28-3-SJ**

27737 AVE. HOPKINS, VALENCIA, CA 91355
PH:800-822-9473 FAX: 661-257-2400
WEB SITE: WWW.WIREANDCABLE.COM