

# Two 24 AWG Conductors Shield & Jacket - Microphone Cable

## CONSTRUCTION DETAILS

A	CONDUCTOR	24 AWG 19/36 BARE COPPER
B	INSULATION	EXTRUDED FLEXIBLE PVC - .010" NOMINAL WALL
C	SHIELD	SPIRAL 36 AWG BARE COPPER - 60% COVERAGE
D	JACKET	EXTRUDED FLEXIBLE PVC - .058" NOMINAL WALL

## DIAMETER (INCH) NOM.

0.025  
0.045  
0.010  
0.220

PART NUMBER CALL OUT: W-4930-090-JACKET COLOR

## PROPERTIES

TEMPERATURE -40°C TO 90°C

VOLTAGE 600 RMS


## CONDUCTOR COLOR CODE

1. BLUE
2. RED

## RoHS COMPLIANT

## PACKAGING

TO BE SUPPLIED ON BULK REELS - 1000 FOOT MINIMUM LENGTHS

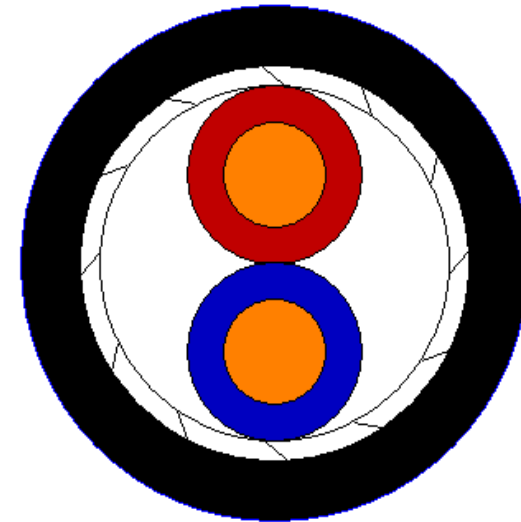

THIS DRAWING IS THE PROPERTY OF THE WHITMOR/WIRENETICS COMPANY AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASES FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE WRITTEN PERMISSION OF THE WHITMOR/WIRENETICS COMPANY

APPROVED BY: M. LEE

DRAWN BY: S. DONEGAN

REVISIONS

N/A	01/12/15	INITIAL RELEASE	

**WHITMOR/WIRENETICS**  
THE LEADER IN HIGH QUALITY WIRE AND CABLE

DRAWING NO: **W-4930-090**

27737 AVE. HOPKINS, VALENCIA, CA 91355  
PH:800-822-9473 FAX: 661-257-2495  
WEB SITE: WWW.WIREANDCABLE.COM